




RevD - M2.5 THREAD DEPTH CORRECTED

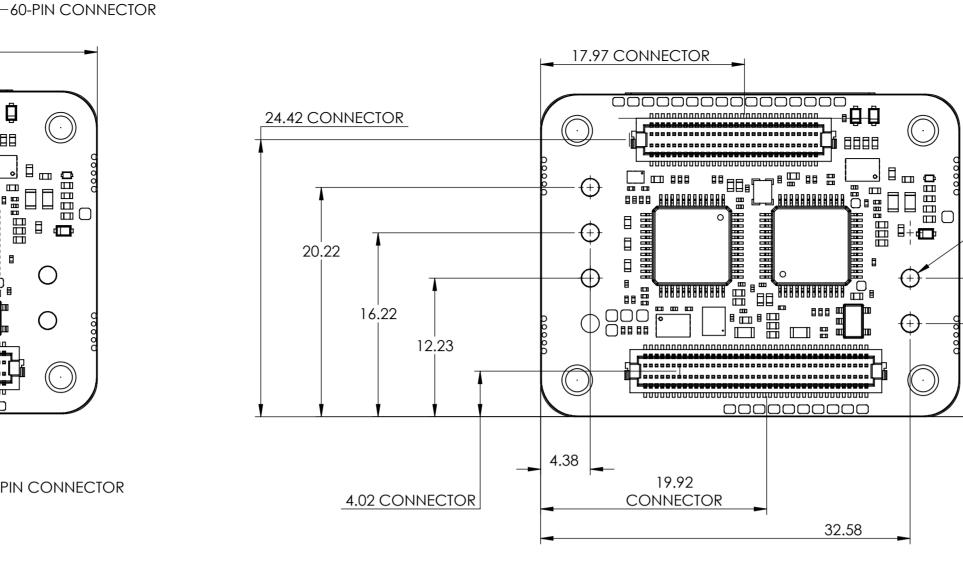

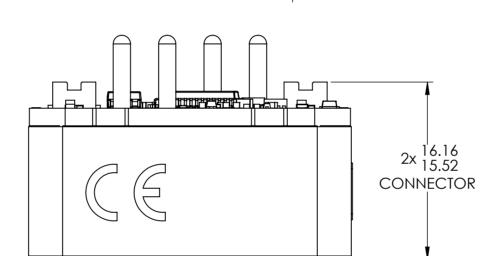


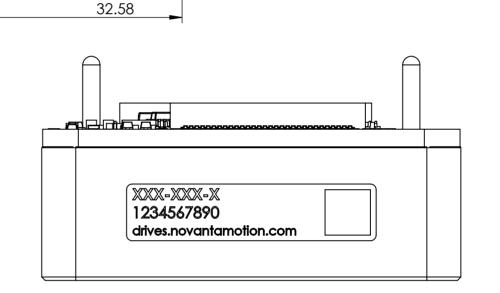

5x Ø 1.65

12.22

8.22

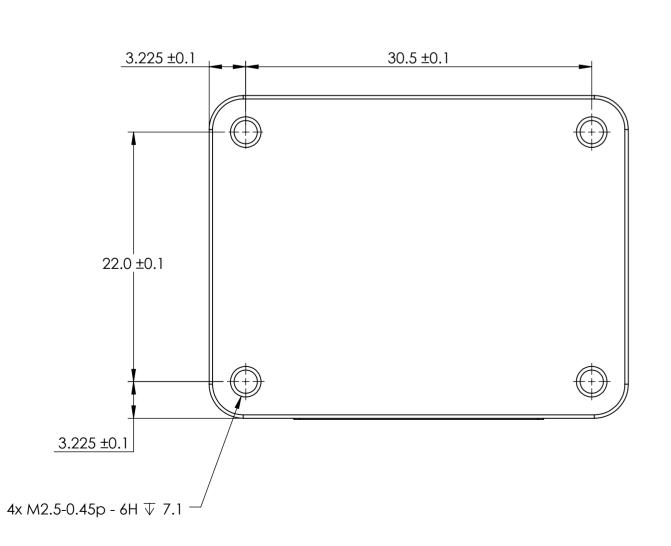

37.0 36.9

0000000000

M Novanta


─80-PIN CONNECTOR

19.76 ±0.5

28.5 28.4

6.42 REF.

13.59 13.09

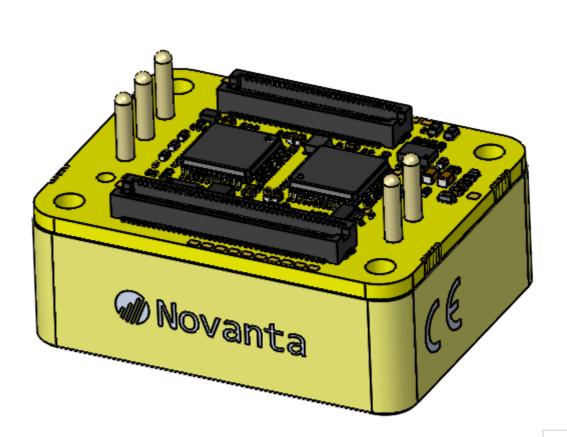

	THIRD ANGLE PROJECTION	NOTES - UNLESS C DIMENSIONS ARE SIZES APPLY AFTEI ITEMS MUST NOT I SCRATCHES, DEN
TOLERANCES: UNLESS OTHERWISE SPECIFIED LINEAR: X ±0.5 X.X ±0.2 X.XX ±0.1 ANGULAR: ±0.5°	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NOVANTA Inc ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION	ITEMS SHOULD BE PACKAGED APPR INTERNAL EXTERN RADIUS RO.3 MAX DRAWING STAND
SURFACE ROUGHNESS: 1.6/	OF NOVANTA IS PROHIBITED info@novanta.com	DO NOT:

1	PACKAGED APPROPRIATELY FOR SHIPPING INTERNAL EXTERNAL CHAMFER 0.3x45° MAX OR RADIUS R0.3 MAX. DRAWING STANDARD: BS 8888				TIT
S					DV N
Ą			NAME	DATE	P.A
1	DO NOT SCALE DRAWING IF IN DOUBT ASK	DRAWN	SES	08/07/2024	N
		APPV'D	XXX	XX/XX/XXXX	

	Nova	anta
Е	Everest Safe EtherCAT	
G	EVS-S-NET-E_DIM	D REV
?T	EVS-S-NET-E	REV B
		SHEET 1 OF 1